


Toothed profile STD S 8M

Standard lengths*

Table 5

Designation	Pitch length L_W (mm)	Number of teeth z
440 – S 8M	440	55
480 – S 8M	480	60
528 – S 8M	528	66
560 – S 8M	560	70
600 – S 8M	600	75
632 – S 8M	632	79
640 – S 8M	640	80
656 – S 8M	656	82
688 – S 8M	688	86
696 – S 8M	696	87
712 – S 8M	712	89
720 – S 8M	720	90
728 – S 8M	728	91
736 – S 8M	736	92
760 – S 8M	760	95
768 – S 8M	768	96
784 – S 8M	784	98
792 – S 8M*	792	99
800 – S 8M	800	100
824 – S 8M	824	103
848 – S 8M	848	106
864 – S 8M	864	108
880 – S 8M	880	110
912 – S 8M	912	114
920 – S 8M	920	115
944 – S 8M	944	118
960 – S 8M	960	120
992 – S 8M	992	124
1000 – S 8M	1000	125
1056 – S 8M	1056	132
1064 – S 8M	1064	133
1072 – S 8M	1072	134
1120 – S 8M	1120	140
1136 – S 8M	1136	142
1160 – S 8M	1160	145
1168 – S 8M	1168	146
1176 – S 8M*	1176	147
1184 – S 8M*	1184	148
1200 – S 8M	1200	150
1216 – S 8M	1216	152
1240 – S 8M	1240	155
1256 – S 8M	1256	157
1264 – S 8M	1264	158
1280 – S 8M	1280	160
1296 – S 8M*	1296	162
1304 – S 8M	1304	163

*Non-stock items, supplied on request.

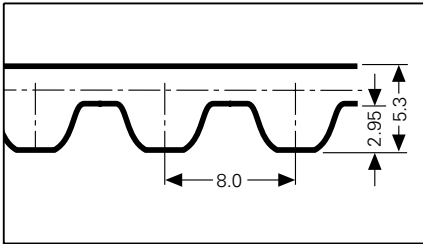

Toothed profile STD S 8M

Standard lengths

Table 5

Designation	Pitch length L_W (mm)	Number of teeth z
1312 – S 8M	1312	164
1344 – S 8M	1344	168
1368 – S 8M	1368	171
1400 – S 8M	1400	175
1408 – S 8M*	1408	176
1440 – S 8M	1440	180
1480 – S 8M	1480	185
1512 – S 8M	1512	189
1552 – S 8M	1552	194
1600 – S 8M	1600	200
1624 – S 8M	1624	203
1760 – S 8M	1760	220
1776 – S 8M	1776	222
1800 – S 8M	1800	225
1816 – S 8M*	1816	227
1912 – S 8M	1812	239
2240 – S 8M	2240	280
2392 – S 8M	2392	299
2800 – S 8M	2800	350
2848 – S 8M*	2848	356

*Non-stock items, supplied on request.

Standard widths: 20, 30, 50, 85 mm, intermediate widths on request.

CONTI SYNCHROFORCE® Heavy-Duty Timing Belts:
Profiles S 2M, S 3M and S 5M on request.